

PM-BREAK 130 with Calpeda pump MXS 507

With LOGIC STP 8,5

TECHNICAL CHARACTERISTICS:

- Usable capacity of the tank: 130 liters
- Installation: floor-mounted
- Automatic operation with constant outlet pressure
- Compliant with EN 1717 (CAT 5) – Belgaqua Certification
- Connection between pump and inverter in stainless steel
- Compact design
- Standard: delivered with one float valve
- On request: delivered with two float valves
- Dry running protection included
- Potential free contact: status system
- Tank color: black (on request blue)
- Material: recyclable polyethylene WRAS compliant
- Power supply : single phase 230V/50Hz



**PMB-130-
MXS507 STP**



Description	Type	Nominal power	Protection
Pump	MXS 507	1500 watt	IPX8
Controller	LOGIC STP 8.5		

Indirizzo / Address

Via Palermo n°30/3 20053 – Rodano (MI) – Italia

Tel. / Phone

+39 379 1305072

Email

info@pmtechconsulting.it

Website

www.pmtechproducts.com
www.pmtechconsulting.it

P.Iva / VAT: IT13416610965



PM-BREAK 130

PMB-130-MXS507 STP

APPLICATIONS

RESIDENTIAL & COMMERCIAL

- Single-family home
- Apartment building
- Small business
- Hospital

AGRICULTURE & FARMING

- Irrigation system
- Livestock farming
- Poultry farming
- Stables

PUBLIC & INDUSTRIAL FACILITIES

- Green wall and vertical garden
- School
- Industrial facilities

MEDICAL & SPECIALIZED USES

- Dental clinic
- Dialysis system
- Cleaning of the tables in funeral house




LOGIC STP 8,5



MXS 507

Width*Depth*Height	600*350*1280mm
Potable water inlet	3/4" M (80 l/min at 3 bar) (or 2*3/4")
Integrated overflow with free-flowing	DN75
Connection after controller	1" M
Maximum liquid temperature	35°

Hydraulic curve MXS 507

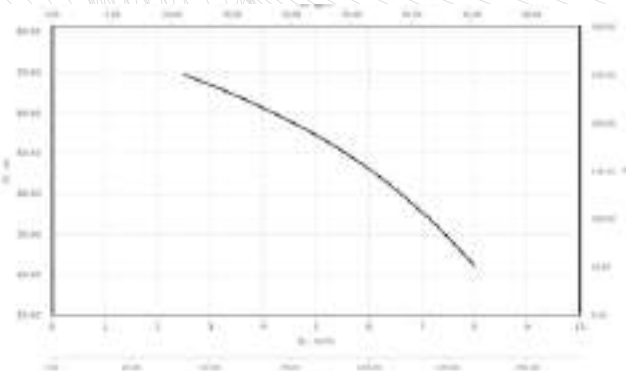

On request: delivered with two float valves