


PM-BREAK 250L with AQUAPULSE 80E

TECHNICAL CHARACTERISTICS

- Usable capacity of the buffer tank: 250 liters
- Installation : on flat floor
- Designed for 1 or 2 5" submersible pumps
- Compliant with EN 1717 (CAT 5) – Belgaqua certified
- Connection between pump and inverter in stainless steel
- Compact design
- The tank fits through a doorway of 80 cm and spiral staircase
- At the bottom of the tank: 2 pre-fitted brass 2" F connections for pressure booster/drain connection
- Easy coupling of multiple tanks on 3 sides (110 mm diameter)
- At the top of the tank: access via 2 lids
- Tank color: black (on request blue)
- Material: recyclable polyethylene WRAS compliant

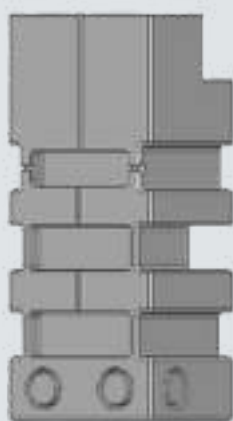

BACK SIDE



OVERFLOW



AQUAPULSE 80E



Indirizzo / Address

Via Palermo n°30/3 20053 – Rodano (MI) – Italia

Tel. / Phone

+39 379 1305072

Email

info@pmtechconsulting.it

Website

www.pmtechproducts.com

www.pmtechconsulting.it

P.Iva / VAT: IT13416610965



PM-BREAK 250L


PMB-250-A80

APPLICATION:

- Rainwater harvesting systems
- Irrigation systems
- Booster sets
- Apartment buildings
- Hotels and resorts
- Hospitals and healthcare facilities
- Dental clinics
- Dialysis centres
- Food and beverage processing plants
- Slaughterhouses
- Industrial washing systems
- Car wash installations
- Swimming pools and spas
- Cooling and HVAC systems
- Agricultural and livestock facilities
- Greenhouses and horticulture
- Chemical and industrial process plants
- Any installation classified as Fluid Category 5 under EN 1717



Performance AQUAPULSE 80-E

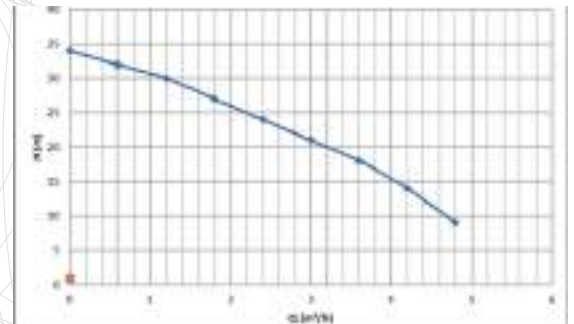

Width*Depth*Height	600*500*1900 mm
Potable water supply	3/4" M
Connection loadpump	1" M
Integrated overflow	DN110
Maximum water temperature	35° C

Booster pump	AQUAPULSE 80E
Pump controller	ON/OFF
Power supply	230V/50Hz

For more technical information regarding pump send us inquiry for technical datasheet