

PM-tank 30L[®]

Compact solution for residential applications

TECHNICAL CHARACTERISTICS

- Useful water storage: 25 liters
- Installation : flat floor or hanging
- The tank is designed for a surface selfpriming pump
- According EN 1717 specifications (CAT 5) – Belgaqua approved
- Integrated overflow DN50
- The PM tank 30 is supplied with 1 float 3/4" AUK Muller DN17
- Compact
- Color: black
- Material: recyclable polyethylene WRAS compliant
- Dimensions : 600*350*380 mm (L*D*H)



3/4 VIEW



FRONT VIEW



Indirizzo / Address

Via Palermo n°30/3 20053 – Rodano (MI) – Italia

Tel. / Phone

+39 379 1305072

Email

info@pmtechconsulting.it

Website

www.pmtechproducts.com
www.pmtechconsulting.it


P.Iva / VAT: IT13416610965



Choose the right tank

PM BREAK 30

Compact solution

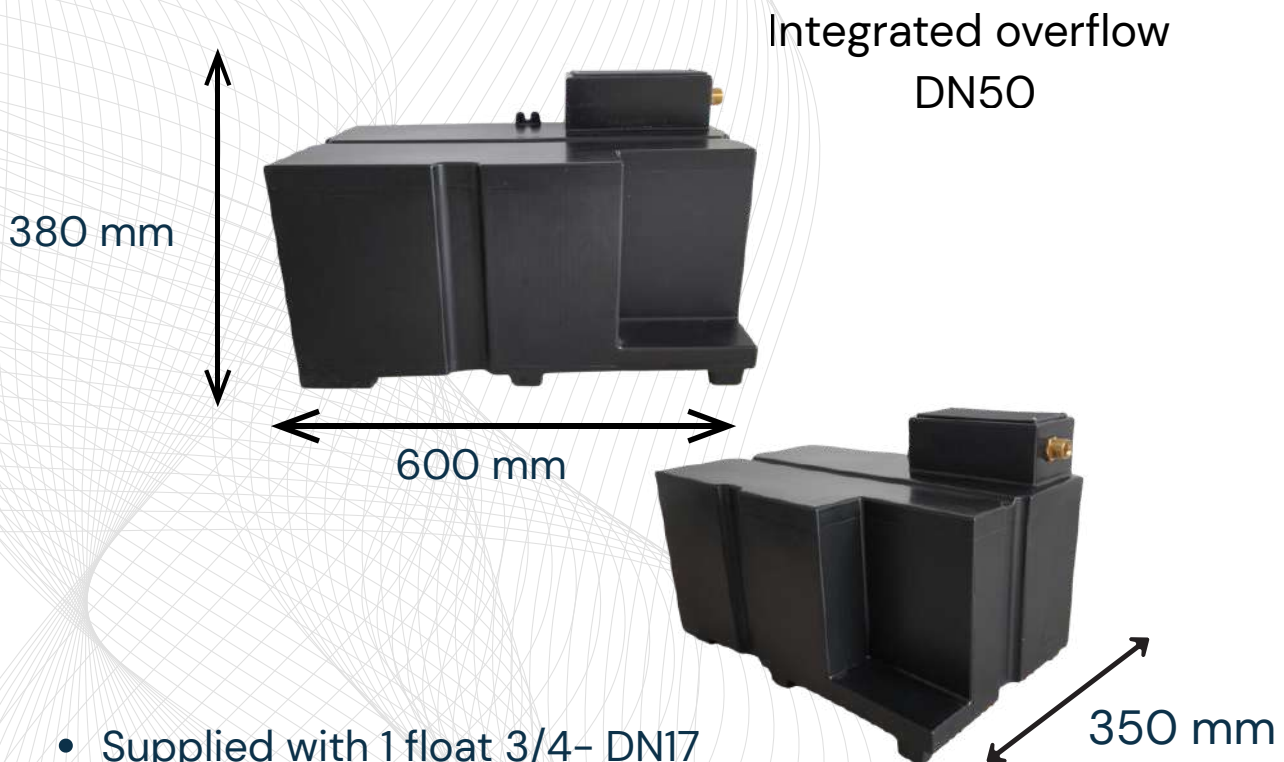

Ideal for:

- ✓ Single family houses and villas
- ✓ Small irrigation systems
- ✓ Dental laboratories
- ✓ Toilet flushing
- ✓ Washing machines

